

2.ASX SERIES

PCB-Mounting Dry Type Power Transformer

EI60/25

2.ASX Series



- Rated power: 25VA
- Non short-circuit proof safety isolating transformer
- Two compartments bobbin
- Protection: Class II transformer
- Ambient temperature 40°C
- Temperature Class B
- Self-extinguishing plastics UL94HB
- Degree of protection IP00
- Moisture protected by varnish
- High electrical safety and long service-life features
- In compliance with: EN61558-1, EN61558-2-6
- Weight: 565g

Approvals:



Electrical Data:

Primary Voltage	Secondary Voltage			Voltage Drop	Rated Power	Height*	Pin	2.ASX Series
	With Load		No Load					
[V]	[V]	@ [A]	[V]	[%]	[VA]	H* [mm]	[Prim / Sec]	Order code
230	6	4.167	7.2	20	25	45.3	1-7/9-13	2.ASX.E06025.203
230	2 x 6	2.083	2 x 7.2	20	25	45.3	1-7/8-9;13-14	2.ASX.E06025.204
230	7.5	3.333	9.0	20	25	45.3	1-7/9-13	2.ASX.E06025.205
230	2 x 7.5	1.667	2 x 9.0	20	25	45.3	1-7/8-9;13-14	2.ASX.E06025.206
230	9	2.778	10.8	20	25	45.3	1-7/9-13	2.ASX.E06025.207
230	2 x 9	1.389	2 x 10.8	20	25	45.3	1-7/8-9;13-14	2.ASX.E06025.208
230	12	2.083	14.4	20	25	45.3	1-7/9-13	2.ASX.E06025.209
230	2 x 12	1.042	2 x 14.4	20	25	45.3	1-7/8-9;13-14	2.ASX.E06025.210
230	15	1.667	18.0	20	25	45.3	1-7/9-13	2.ASX.E06025.211
230	2 x 15	0.833	2 x 18.0	20	25	45.3	1-7/8-9;13-14	2.ASX.E06025.212
230	18	1.389	21.6	20	25	45.3	1-7/9-13	2.ASX.E06025.213
230	2 x 18	0.694	2 x 21.6	20	25	45.3	1-7/8-9;13-14	2.ASX.E06025.214
230	21	1.190	25.2	20	25	45.3	1-7/9-13	2.ASX.E06025.215
230	2 x 21	0.595	2 x 25.2	20	25	45.3	1-7/8-9;13-14	2.ASX.E06025.216

* See Mechanical Data

Types available on request:

Primary Voltage	Secondary Voltage			Voltage Drop	Rated Power	Height*	Pin	9.xxx Series
	With Load		No Load					
[V]	[V]	@ [mA]	[V]	[%]	[VA]	H* [mm]	[Prim / Sec]	Order code
<600			<400	20	18	40.9	1, 7 / 8, 9, 13, 14	9.xxx.E06020.xxx
<600			<400	20	25	45.3	1, 7 / 8, 9, 13, 14	9.xxx.E06025.xxx
<600			<400	20	30	50.3	1, 7 / 8, 9, 13, 14	9.xxx.E06030.xxx



* See Mechanical Data

2.ASX SERIES



PCB-Mounting Dry Type Power Transformer

EI60/25

Possible Connection Types:

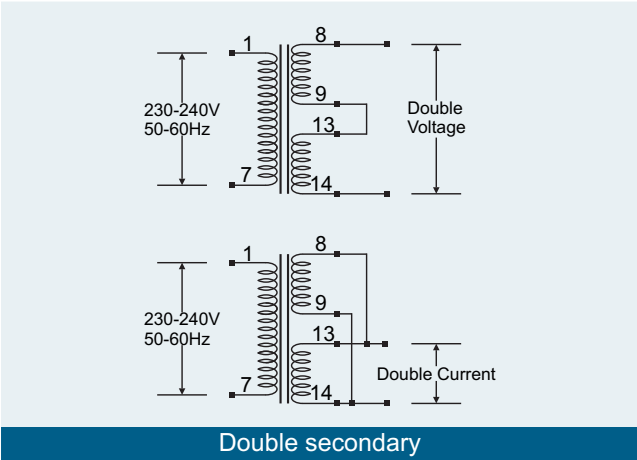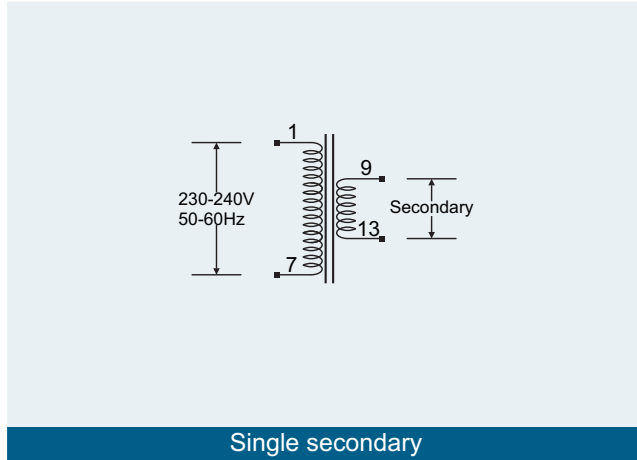

Mechanical Data:

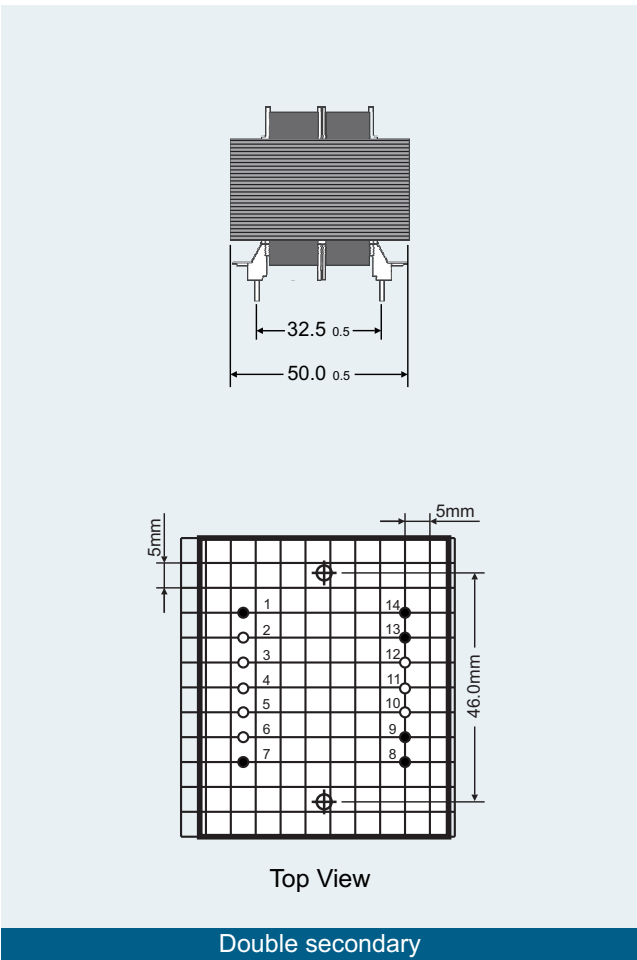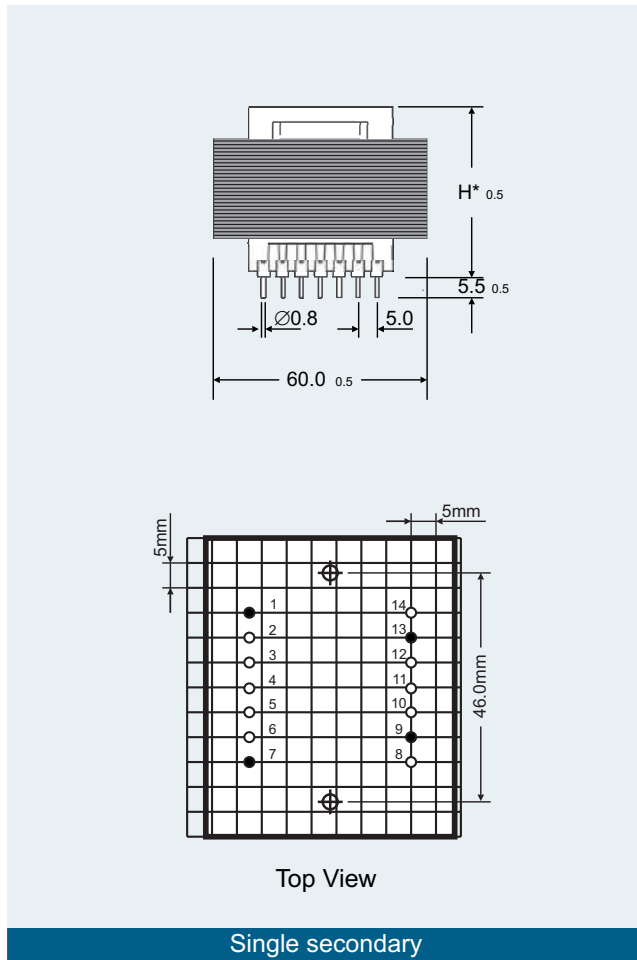

*Transformer height is given in table with Electrical Data